


The permeable allround grid.

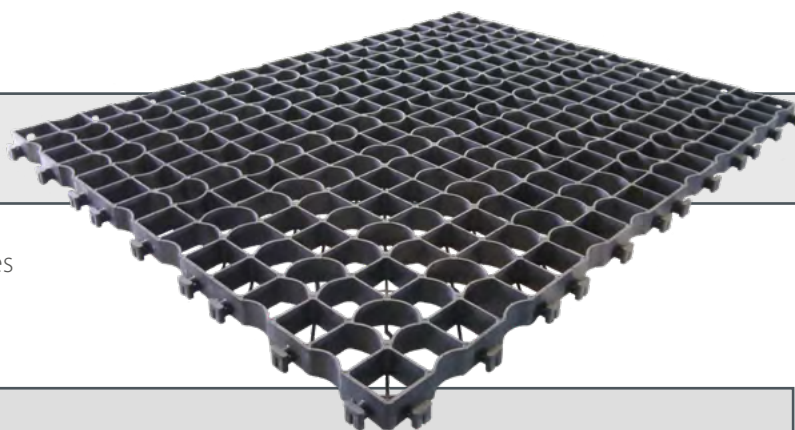

recommended for:

- car-parking spaces
- driveways
- camping sites

Specifications	
Dimensions:	133 x 100 x 4 cm 52.36 x 39.37 x 1.57 "
Wall thickness:	up to 3.0 mm 1.12 "
Dimensional stability:	-50° / 90° C -58° / 194° F
Solubility:	resistant to acids, alkalis, alcohol, oil and petrol (de-icing salt, ammonia, acid rain, etc.)
Moisture absorption:	0,01 %
Weight per m² 10.76 ft²:	4.8 kg 10.58 lbs.
Weight per piece:	6.35 kg 14 lbs
Interlock:	42 notched connectors per panel
Max. open surface:	approx. 87 %
Material:	LD-PE, recycled
Loadability:	up to 800 t/m ² (depending on fill type)
Compressive strength:	up to 20 t point axle load (DIN 1072)
UV- resistant and weatherproof:	according to DIN EN ISO 4892-2
Environmental compatibility:	environmentally neutral according to OECD 202:2004
Highly durable:	according to DIN EN 124
Tensile strength:	> 5 kN/m
Package	
Standard installation unit:	1 layer (= pieces, equates 1.33 m ²)
Layer per pallet:	56
Area per pallet:	74,67 m ²
Qty. per pallet:	56
Dimensions:	100,5 x 135 x 240 cm 39.57 x 53.15 x 94.49 "
Weight per pallet:	365 kg 804.69 lbs (incl. plastic pallet and packaging)



NOTE:

- a. Please note the installation instructions on our website! Subject to change without prior notice. E. & O.E.
- b. The listed details are nominal dimensions and subject to a certain tolerance due to material changes.

Your contact: